


# SOMMERS HEAT OVERHEAD FOOD WARMER

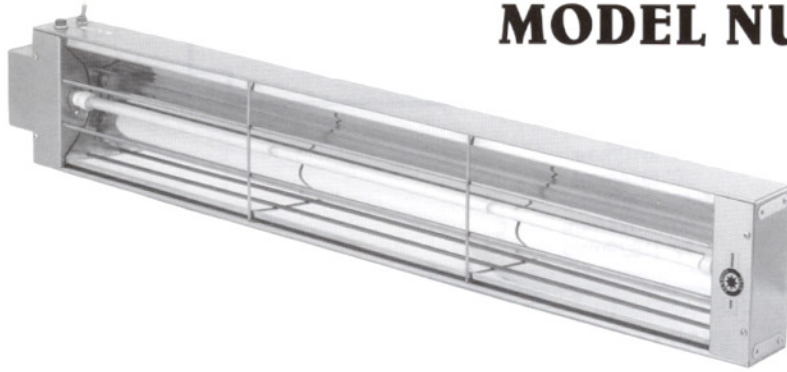

**MODEL NUMBER:** **ESFW-18**  
**ESFW-24**  
**ESFW-36**  
**ESFW-48**  
**ESFW-60**  
**ESFW-72**

## CONSTRUCTION:

Stainless steel outer shell  
Stainless steel mirror finish shield

Stainless steel mounting brackets  
Stainless steel protector wire grid

## STANDARD EQUIPMENT:

Pilot indicator light  
Heat resistant On/Off toggle switch  
Tab mounting brackets  
ES spring loaded sockets for easy replacement of heat tubes

Quartz heat tube  
(optional metal element)  
'J'box mounted on R.H.end of unit

## OPTIONAL:

Infinite control  
50 cycle  
Merchandising lights  
Portable stand ends


Low wattage quartz tube  
Metal element, regular/or high wattage  
6'cord & plug (nema 5-15p)  
'J'box front mounted  
Infinite control supplied remote

## ELECTRICAL REQUIREMENTS:

120 volt, 208 volt, 240 volt, single phase, 60 cycles  
SPECIFY WHEN ORDERING

# SOMMERS HEAT OVERHEAD FOOD WARMER

## DIMENSIONS:

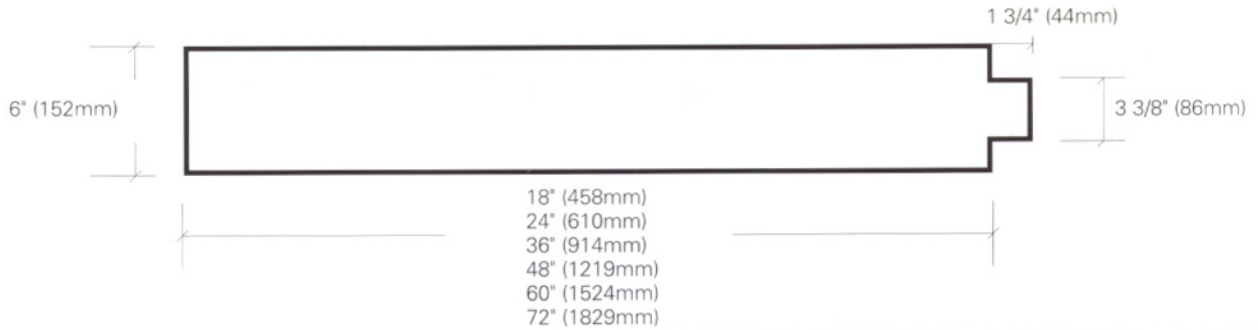

MODEL	AMPERAGE			STANDARD WATTAGE	WIDTH	LENGTH	DEPTH	SHIP WT.
	120V	208V	240V					
ESFW-18	3.4	2.0	1.7	400	6" 152mm	18" 458mm	2.5" 63.5mm	7lbs. 3.2kg
ESFW-24	5.3	3.0	2.6	625	6" 152mm	24" 610mm	2.5" 63.5mm	8lbs. 3.6kg
ESFW-36	6.9	4.0	3.4	825	6" 152mm	36" 914mm	2.5" 63.5mm	10lbs. 4.5kg
ESFW-48	9.2	5.3	4.6	1100	6" 152mm	48" 1219mm	2.5" 63.5mm	12lbs. 5.5kg
ESFW-60	12.5	7.2	6.3	1450	6" 152mm	60" 1524mm	2.5" 63.5mm	20lbs. 9.1
ESFW-72	13.8	7.9	6.9	1650	6" 152mm	72" 1829mm	2.5" 63.5mm	23lbs. 10.5kg

## OPTIONAL:

### "LW" Low wattage infra-red quartz tubes

ESLW-18, 370 watts      ESLW-24, 460 watts  
 ESLW-36, 600 watts      ESLW-48, 825 watts  
 ESLW-60, 1060 watts      ESLW-72, 1200 watts

### "M" Metal sheath elements (standard wattage)

ESM-18, 300 watts      ESM-24, 400 watts  
 ESM-36, 600 watts      ESM-48, 800 watts  
 ESM-60, 1000 watts      ESM-72, 1200 watts

### "HWM" Metal sheath elements (high wattage)

ESM-18, HW.575 watts      ESLW-24, HW.625 watts  
 ESM-36, HW.825 watts      ESLW-48, HW.1100 watts  
 ESM-60, HW.1450 watts      ESLW-72, HW.1650 watts

## INSTALLATION INSTRUCTIONS:

Using the tab mounting brackets, install the overhead warmer at least 1" (25.4mm) from the overhead surface. Space for air circulation must be left to allow for ventilation, otherwise the heat build up may cause the wiring and the switch to malfunction. Do not install over combustible materials at a height less than 15' (381mm). Wiring must be suitable for 194 degrees Fahrenheit (90°C)

## BID SPECIFICATIONS:

Overhead food warmer to be:  
**SOMMERS HEAT FOOD WARMER**  
 complete with stainless steel outer shell, stainless steel inner reflector shield, stainless steel mounting bracket & stainless steel protector wire grid, infra-red heat tube or metal sheath secured with Sommers ES-sockets

Model ..... Voltage ..... Single Phase:/Options: .....

**WARRANTY: 3 YEARS ON HEAT TUBES (LIGHT BULBS EXCLUDED)**